



# SC ROTATING NOZZLES

This self cleaning and self rotating CIP nozzle will even operate when submerged under the residue in the bottom of a vessel.

This nozzle contains no ball bearings and minimum moving parts and is therefore subject to less wear and subsequent maintenance.

## Specification

- 360° spray coverage to vessels 2 meters in diameter.
- Will fit through a bung hole of 25mm
- Max operating pressure: 10 bar
- Weight: SC 1/4 - 60g  
SC 1/2 - 160g


## Construction

Constructed from SS303 or SS316



SC 1/4

SC 1/2

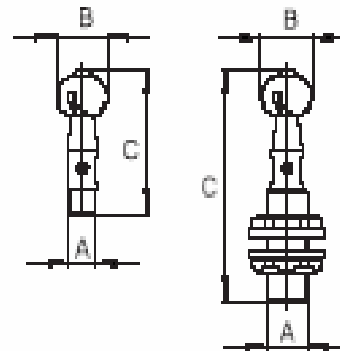

Model	Flow rate ltrs/min					
	2 bar	3 bar	4 bar	5 bar	7.5 bar	10 bar
SC	16	20	23	36	31	37

Code	A	B	C
SC1/4	1/4" BSPM	25mm	60mm
SC1/2	1/2" BSP	25mm	95mm