

Fine Atomisation nozzle



The MW offers outstanding atomisation, producing a mist at low pressure and fog and high pressure.

It has a rugged pinless design with drip free performance, producing a cone shaped fogging pattern.



Specifications

Flow rates: 0.032 to 0.517 l/min


70 micron polypropylene filter

Minimum operating pressure: 7 bar

Optional safety wire hole

Construction

Constructed from SS303 or SS316, with polypropylene filter and Viton o-ring seal.

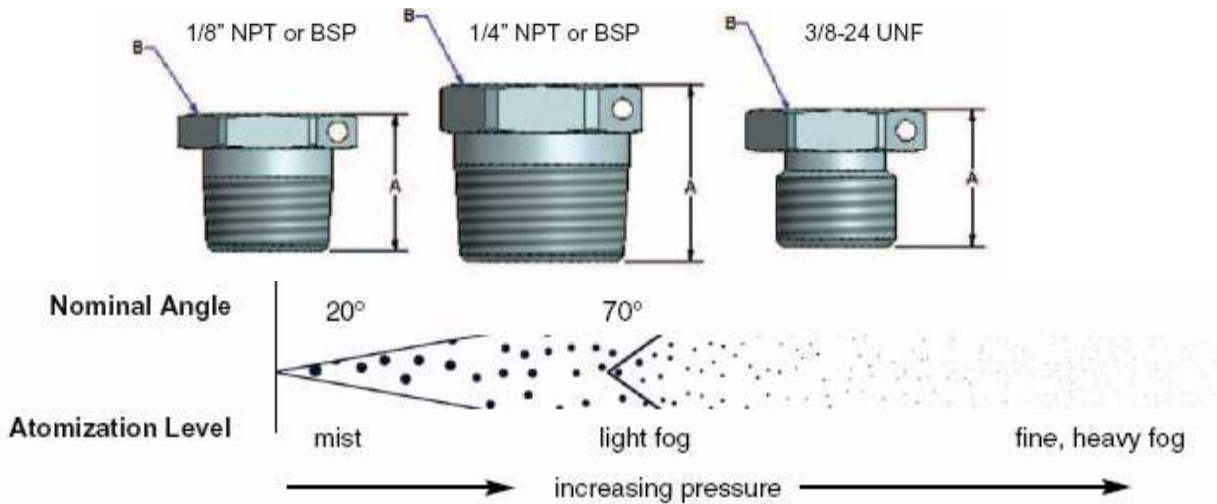

Model No.	Male Pipe Size	l/min @ bar							
		7	20	40	70	100	140	170	200
MW085	1/8 or 1/4 or 24 UNF	0.032	0.055	0.077	0.102	0.122	0.145	0.160	0.160
MW105		0.040	0.068	0.096	0.127	0.151	0.179	0.197	0.197
MW125		0.048	0.081	0.114	0.151	0.180	0.213	0.235	0.235
MW145		0.055	0.093	0.132	0.175	0.209	0.247	0.272	0.272
MW195		0.074	0.126	0.178	0.235	0.281	0.332	0.366	0.366
MW275		0.105	0.177	0.251	0.332	0.396	0.469	0.517	0.517