

SJ Swivel Joints



Adjustable swivel joints allow custom alignment of spray nozzles without expensive piping changes.

Characteristics

Adjustment angles: From 30° to 45° - giving greater control of spray direction for precise coverage.

Leak-proof design


Construction

Standard materials are brass and stainless steel.

Other materials available on request.



Optional NF nozzle shown - choose nozzle when ordering

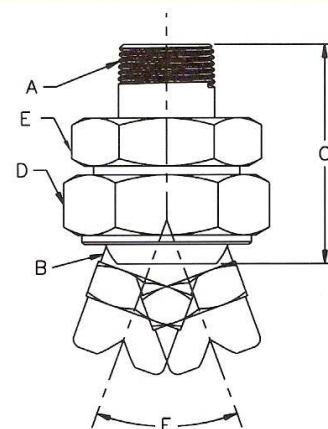

Part No	A Inlet Pipe Conn. BSP or NPT	B Outlet Pipe Conn. BSP or NPT	C Overall length (mm)	D Hex size (mm)	E Hex Size (mm)	F Angle of Adjust- ment	Net Wt (g)
1/8 x 1/8 SJ	1/8M	1/8F	31.8	20.7	20.7	55°	56.7
1/4 x 1/4 SJ	1/4M	1/4F	38.1	28.7	25.4	70	111
3/8 x 1/4 SJ	3/8M	1/4F	44.5	38.1	35.1	70	244
3/8 x 3/8 SJ	3/8M	3/8 F	45.5	38.1	35.1	55	366
1/2 x 3/8 SJ	1/2M	3/8 F	50.8	44.5	41.4	55	346
1/2 x 1/2 SJ	1/2M	1/2 F	50.8	44.5	41.4	60	346
3/4 x 1/2 SJ	3/4M	1/2 F	54.1	50.8	47.8	40	505
3/4 x 3/4 SJ	3/4M	3/4 F	54.1	50.8	47.8	40	465
1 x 1 SJ	1M	1 F	76.2	62.0	57.2	40	967
1 1/4 x 1 1/4 SJ	1 1/4M	1 1/4F	88.9	79.5	73.2	30	1899
1 1/2 x 1 1/2 SJ	1 1/2M	1 1/2F	98.6	85.9	85.9	30	2679
2 x 2 SJ	2 M	2 F	105	102	88.9	40	2920